


داخلی ریموت 3CX در گرنفداستریم GXP1625



PERSIAN VOIPSHOP
سپهر ارتباط گویا
persianvoipshop.ir
persianvoipshop
۴۱۲۵۸۰۰۰


نحوه راه اندازی داخلی ریموت 3CX در تلفن گرنداستریم GXP1625

وارد پنل 3CX شوید و در بخش داخلی ها یک داخلی ایجاد نمایید سپس در منوی options تیک مربوط به Disallow use of extension outside the LAN را بردارید .

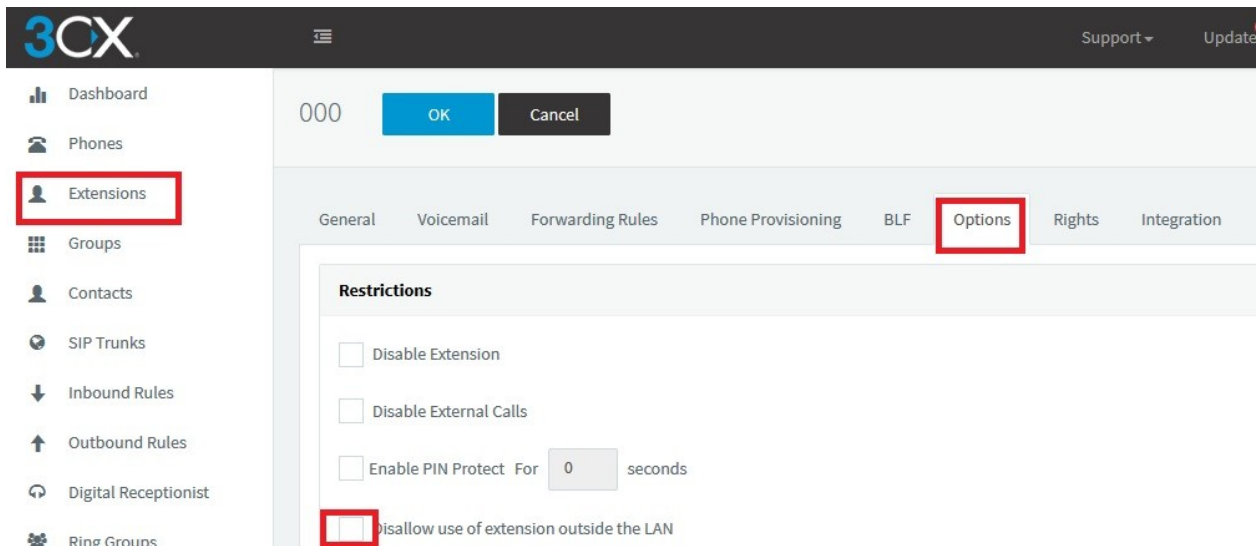

The screenshot shows the 3CX web interface. On the left sidebar, 'Extensions' is highlighted with a red box. The main content area shows the configuration for extension 000. The 'Options' tab is selected and highlighted with a red box. Under the 'Restrictions' section, the checkbox for 'Disallow use of extension outside the LAN' is checked and highlighted with a red box.

سپس در مرحله بعد وارد تب Phone Provisioning شوید گزینه add را بزنیید مدل تلفن خود را انتخاب کنید و سپس آدرس MAC را بدون : وارد نمایید .

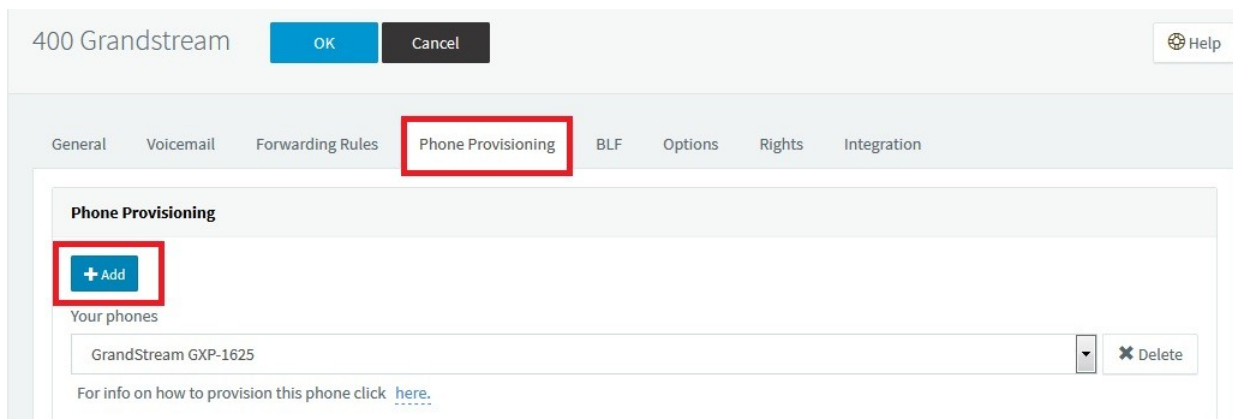

The screenshot shows the 3CX web interface for phone provisioning. The 'Phone Provisioning' tab is selected and highlighted with a red box. In the 'Phone Provisioning' section, the '+ Add' button is highlighted with a red box. Below it, a list of phones is shown with 'GrandStream GXP-1625' as the selected model. A 'Delete' button is also visible.



Add Phone

Choose from available models

GrandStream GXP-1625

Mac Address

000B82DF9202

OK Cancel

در مرحله بعد وارد تنظیمات گرندهاسنریم شوید و در بخش accounts مشخصات داخلی را وارد نمایید با این تفاوت که به جای آدرس آی پی SIP Server باید نام دامنه مرکز تلفن 3CX خود را وارد نمایید .

General Settings

Account Active No Yes

Account Name 400

SIP Server sepehrtel.3cx.az

Secondary SIP Server

Outbound Proxy

Backup Outbound Proxy

BLF Server


SIP User ID 400

Authenticate ID 400

Authenticate Password

Name

و در مرحله آخر وارد منوی Settings >> General Settings شوید و در بخش STUN Server عبارت stun.3cx.com:5090 را وارد نمایید .

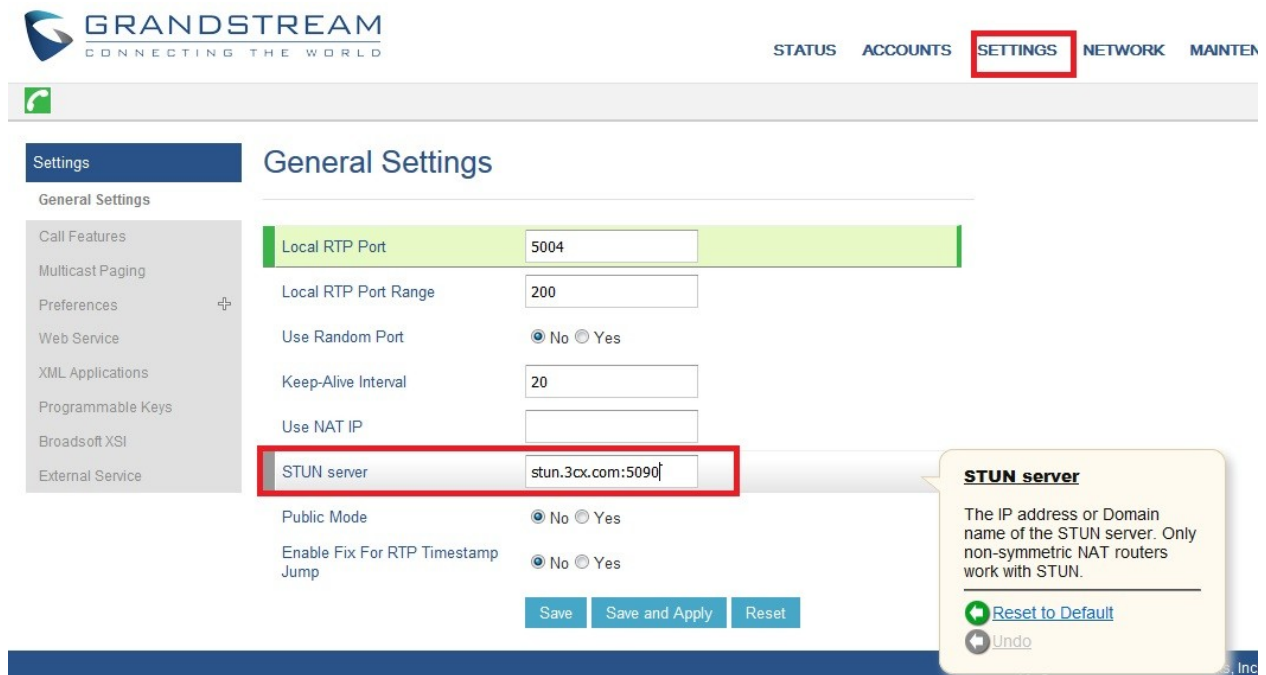

The screenshot shows the Grandstream web interface for configuring STUN server settings. The 'Settings' menu is highlighted, and the 'General Settings' page is displayed. The 'STUN server' field is highlighted with a red box and contains the value 'stun.3cx.com:5090'. A tooltip titled 'STUN server' provides additional information: 'The IP address or Domain name of the STUN server. Only non-symmetric NAT routers work with STUN.' Below the tooltip are buttons for 'Reset to Default' and 'Undo'. Other settings visible include 'Local RTP Port' (5004), 'Local RTP Port Range' (200), 'Use Random Port' (No), 'Keep-Alive Interval' (20), 'Use NAT IP', 'Public Mode' (No), and 'Enable Fix For RTP Timestamp Jump' (No). Buttons for 'Save', 'Save and Apply', and 'Reset' are located at the bottom of the settings area.



جهت کسب اطلاعات بیشتر با ما تماس بگیرید

۴۱۲۵۸۰۰۰

www.Persianvoipshop.ir

It's good to talk



سپهر ارتباط گویا