

# **VoIP Phone**

VI2006

User Manual



## Safety Notices

Please read the following safety notices before installing or using this phone. They are crucial for the safe and reliable operation of the device.

- Please use the external power supply that is included in the package. Other power supplies may cause damage to the phone, affect the behavior or induce noise.
- Before using the external power supply in the package, please check with home power voltage. Inaccurate power voltage may cause fire and damage.
- Please do not damage the power cord. If power cord or plug is impaired, do not use it, it may cause fire or electric shock.
- The plug-socket combination must be accessible at all times because it serves as the main disconnecting device.
- Do not drop, knock or shake it. Rough handling can break internal circuit boards.
- Do not install the device in places where there is direct sunlight. Also do not put the device on carpets or cushions. It may cause fire or breakdown.
- Avoid exposure the phone to high temperature, below 0°C or high humidity. Avoid wetting the unit with any liquid.
- Do not attempt to open it. Non-expert handling of the device could damage it. Consult your authorized dealer for help, or else it may cause fire, electric shock and breakdown.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean it. Wipe it with a soft cloth that has been slightly dampened in a mild soap and water solution.
- When lightning, do not touch power plug or phone line, it may cause an electric shock.
- Do not install this phone in an ill-ventilated place.
- You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents.

# Table of Content

<b>1. INTRODUCING VI2006 VOIP PHONE</b> .....	<b>5</b>
1.1. THANK YOU FOR YOUR PURCHASING VI2006.....	5
1.2. DELIVERY CONTENT .....	5
1.3. KEYPAD.....	6
1.4. PORT FOR CONNECTING .....	7
<b>2.INITIAL CONNECTING AND SETTING</b> .....	<b>8</b>
2.1. CONNECT THE PHONE .....	8
2.2. INITIAL SETTING .....	9
2.2.1. PPPoE mode.....	9
2.2.2. Static IP mode:.....	10
2.2.3. DHCP mode .....	11
<b>3. BASIC FUNCTIONS</b> .....	<b>12</b>
3.1. BASIC OPERATION.....	12
3.1.1. Accepting a call.....	12
3.1.2. Making a call.....	12
3.1.3. Ending a call.....	13
3.1.4. Transferring a call.....	13
3.1.5. Calling Hold and 3 ways call.....	14
3.1.6. Callers .....	14
3.2. THE HIGH-LEVEL OPERATION .....	15
3.2.1. Special Keys.....	15
3.2.2. Call pickup.....	15
3.2.3. join call.....	15
3.2.4. redial/unredial .....	15
3.2.5. click to dial .....	16
<b>4. SETTING</b> .....	<b>16</b>
4.1. SETTING METHODS.....	16
4.2. SETTING VIA WEB BROWSE .....	16
4.3. CONFIGURATION VIA WEB .....	17
4.3.1. BASIC.....	17
4.3.1.1. Status .....	17
4.3.1.2. Wizard .....	18
4.3.1.3. Call Log .....	19
4.3.1.4. MMI SET .....	20
4.3.2. Network.....	20
4.3.2.1. WAN Config .....	20
4.3.2.2. Qos Config.....	22
4.3.2.3. Service Port .....	24
4.3.2.4. SNTP.....	24
4.3.3. VOIP .....	25
4.3.3.1. SIP Config.....	25
4.3.3.2. Stun Config.....	28
4.3.3.3. DIAL PEER setting .....	30
4.3.4. Phone .....	33
4.3.4.1. DSP Config .....	33
4.3.4.2. Call Service.....	34
4.3.4.3. Digital Map Configuration .....	35
4.3.4.4. Phone Book .....	36
4.3.5. Maintenance .....	37
4.3.5.1. Auto Provision.....	37
4.3.5.2. Syslog Config.....	38
4.3.5.3. Config Setting.....	39
4.3.5.4. Update .....	39

4.3.5.5. Account Config .....	40
4.3.5.6. Reboot.....	41
4.3.6. Security .....	41
4.3.6.1. MMI Filter .....	41
4.3.6.2. Firewall.....	42
4.3.7. Logout.....	43
4.4. SETTINGS VIA PHONE'S KEYBOARD. ....	43
4.4.1. How to set via the phone's keyboard.....	43
4.4.2. Phone menu.....	44
5. APPENDIX .....	44
5.1. SPECIFICATION .....	44
5.1.1. Device specification .....	44
5.1.2. Voice Features.....	45
5.1.3. Network Features.....	45
5.1.4. Maintenance and Management.....	45
5.2. DIGIT-CHARACTER MAP TABLE.....	46

# 1. Introducing VI2006 VoIP Phone

## 1.1. Thank you for your purchasing VI2006

Thank you for your purchasing VI2006, VI2006 is a full-feature telephone that provides voice communication over the same data network that your computer uses. This phone functions not only much like a traditional phone, allowing to place and receive calls, and enjoy other features that traditional phone has, but also it own many data services features which you could not expect from a traditional telephone.

This guide will help you easily use the various features and services available on your phone.



## 1.2. Delivery Content

Please check whether the delivery contains the following parts:

- The base unit with display and keypad
- The handset
- The handset cable
- The power supply
- The Ethernet cable



### 1.3. Keypad



The numeric keypad with the keys 0 to 9, \*, and # is used to enter

Digits and letters, additionally, the following keys are available:

Key mapping:

Key	Key name	Function Description
	Menu	In idle state, press the MENU key to call up the menu.
	Phone Book	In idle mode, press the Phone Book key to check the record list and add new records and revise the record. Press this key again will return to idle mode.
	Callers	In idle/pickup/calling mode, press the Callers key to Check the Income/Outgoing/Missed calls records. Press this key again will return to idle mode
	LED	LED blinks to remind user new voicemail.
	System Information	In idle mode, press the Sysinfo key to check the phone setting parameters. Such as local phone number, local IP and local Gateway IP address.
	Confirm	Use the Enter key to enter next menu, or confirm the setting.
	Exit	Use the Exit key to return to previous menu, ,cancel the setting, or reject to answer a call.
	Navigation Key	When you pick up the handset or during calling, you can use this key to turn up or turn down the handset volume; when a call comes, you can use this key to adjust ring volume; you also can use this key to choose item in the menu, callers or phone book.
	MWI	Use this key to read old or new message.
	Transfer	Use the key to realize blind transfer or attended transfer please refer to <b>3.1.4.-call transfer</b> for more details).
	Conference	Use this key to realize the three party call ( please refer to <b>3.1.5-Calling Hold and 3 ways call</b> for more details)



Delete

In menu, use this key to modify current setting or delete invalid information. And when you input number do call out, you can use it to delete characters



Hold

Temporarily hold the active call during the talking; press the key again to unhold the call. You also can press this key then input the third party's phone number and end with the # key during calling, you can make a call with the third party and hold the previous calling. **(3.1.5-Calling Hold and 3 ways call).**



Mute

Press this key in calling mode, you can hear the other side, and the other side can not hear you



R/send

In the hook off /hands-free mode, use the key to dial the last call number; use this key to make a quick dial as soon as you select your desired number in phone book or callers.



Handfree

Enter into hands-free mode.

### 1.4. Port for connecting



<b>POWER</b>	Power switch	Select ON/OFF
<b>DC</b>	Power port	Output: 5V/1.0A
<b>LAN</b>	Network port	Connect it to PC
<b>WAN</b>	Network port	Connect it to Network

The phone has two Network ports: The WAN port and the LAN port. Before you connect the power source, please carefully read Safety Notices of this user manual.

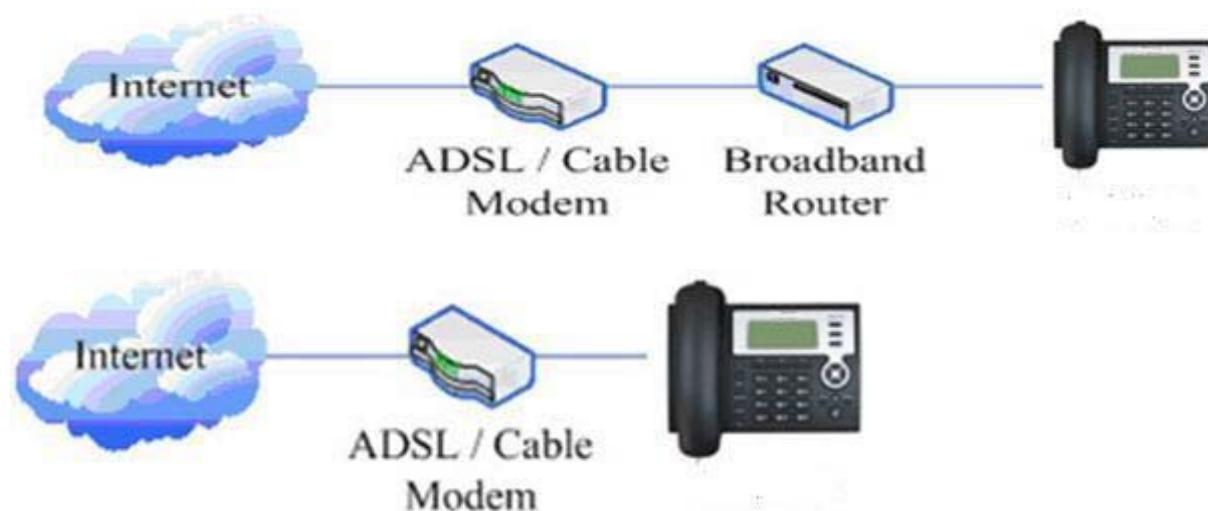
## 2.Initial connecting and Setting

### 2.1. connect the phone

Step 1: Connect the IP Phone to the corporate IP telephony network. Before you connect the phone to the network, please check if your network can work normally.

You can do this in one of two ways, depending on how your workspace is set up.

Direct network connection—by this method, you need at least one available Ethernet port in your workspace. Use the Ethernet cable in the package to connect WAN port on the back of your phone to the Ethernet port in your workspace. you can make direct network connect. The following two figures are for your reference.



Shared network connection—Use this method if you have a single Ethernet port in your workspace with your desktop computer already connected to it. First, disconnect the Ethernet cable from the computer and attach it to the WAN port on the back of your phone. Next, use the Ethernet cable in the package to connect LAN port on the back of your phone to your desktop computer. Your IP Phone now shares a network connection with your computer. The following figure is for your reference.



Step 2: Connect the handset to the handset port by the handset cable in the package.

Step 3: connect the power supply plug to the DC port on the back of the phone. Use the power cable to connect the power supply to a standard power outlet in your workspace.

Step 4: push the on/off switch on the back of the phone to the on side, then the phone's LCD screen displays "WAIT LOGON". Later, a ready screen typically displays the date, time and current network

mode.

If your LCD screen displays different information from the above, you need refer to the next section “Initial setting” to set your network online mode.

If your VoIP phone registers into corporate IP telephony Server, your phone is ready to use.

## 2.2. Initial Setting



This VoIP Phone provides you with rich function and parameters setting. If you have enough knowledge about network and SIP protocol, it is better for you to understand many parameters. But if you know little about network and SIP protocol, you can also easily make initial setting according to the following steps to enjoy rapidly high quality voice and low cost from this VoIP Phone.


Before make initial setting, please check if your corporate IP telephony network can work normally, and you have finished “connect the phone”.

This VoIP Phone Supports DHCP by default. It will receive an IP address and other network-related settings (Netmask, IP gateway, DNS server) from the DHCP server. If your network supports DHCP, you can connect this VoIP Phone directly to the network. If your network doesn't support DHCP, you need change this VoIP Phone's network connection setting. According to the following steps, change this VoIP Phone's DHCP network connection setting into PPPoE or static IP which your network supports at present.

### 2.2.1. PPPoE mode.



1. Press the 3 key for three seconds, then confirm it by the Enter key, your phone network connection mode will switch into PPPoE mode. Prepare your PPPoE account name and password.
2. Press the MENU key, the LCD screen will display “INPUT PASSWORD”.
3. Input the password (default value is 123), and press the ENTER key, the LCD screen will display “NETWORK”.

4. Press the  key and LCD screen will display “LAN”, press the  key, enter it by the  key, the LCD screen will display “STATIC NET”. Then press the  key again, enter it by the  key, the LCD screen will display “USER NAME”.









5. Press the  key and then press the  key, input your PPPOE account number then press the  key to confirm. The LCD screen will display the inputted PPPOE account number.

6. Press the  key to return to the previous menu, then press the  key, the LCD screen will display “PASSWORD”. Then press the ENTER key, and the DEL key, input your PPPoE's password and confirm it by the  Key, the LCD screen will display the password which you inputted.


7. Press the EXIT key for four times and press the DOWN key, till the LCD screen display “SYSTEM”.



8. Press the ENTER key, the screen display "SAVE", then press the  key again, the LCD screen will display "ARE YOU SURE".
9. Press the  key, the phone will save your setting and the LCD screen will display "SAVING NOW", then return to display "SAVE".
10. Press the  key twice, then press numeric key "3" and hold until the screen display "ARE YOU SURE". Press the  key, the screen will display "CHANGING", which means that the phone is trying to switch to PPPoE mode. If the icon "PPPoE" on the top of the screen keeps blink, it shows that the phone is trying to access the PPPoE server., and the IP is still static IP if you press  key to display the current IP; if the icon "PPPoE" is showed without blink, it means that the phone has already gotten IP from PPPoE server.

### 2.2.2. Static IP mode:



1. Press the 1 key for three seconds, then confirm it by the  key, your phone network connection mode will switch into Static IP mode. Prepare your phone's network parameters. They are IP Address of this phone, Subnet Mask, Default Gateway/ Router and DNS. You can ask your VoIP service provider for those parameters.
2. Press the  key, the LCD screen will display "INPUT PASSWORD".
3. Input password (default is 123), then press the  key, the LCD screen will display "NETWORK".
4. Press the  key, and the LCD screen will display "LAN". Press the  key, then the  key, the LCD screen will display "STATIC NET".
5. Press the  key, the LCD screen will display "IP". Press the  key again and then the  key, input your desired IP address for your IP phone and confirmed by pressing the  key, then the LCD will display the inputted IP address. When inputting IP with keypad, use "\*" instead of ".".
6. Press the  key to return to previous menu, then press the  key, the LCD screen will display "DNS2". Press the  key then the  key, input your spare DNS address and confirm it by pressing the  key, and then the LCD will display the inputted DNS address.
7. Press the  key to return to previous menu, then press the  key, the LCD screen will display "DNS". Press the  key then the  key, input your DNS address and


confirm it by pressing the  key, and then the LCD will display the inputted DNS address.


8. Press the  key to return to the previous menu, and then press the  key, the LCD screen will display "GATEWAY". Press the  key again and then the  key, input your gateway's IP address and confirm it by pressing the  key, the LCD screen will display the inputted gateway address.

9. Press the  key to return to the previous menu, and then press the  key, the LCD screen will display "NETMASK". Press the  key again and then the  key, input your netmask and press the  key to confirm it. The LCD screen will display the inputted netmask.

10. Press the  key for four times and press the  key, till the LCD Screen displays "SYSTEM".

11. Press the  key, the LCD screen will display "save", then press the  key again, the LCD screen will display "ARE YOU SURE".

12. Press the  key, this phone will display "SAVING NOW", then return to display "SAVE".

13. Press the  key twice to exit the menu, and then press the numeric key 1 till the LCD screen displays "ARE YOU SURE". Press the  key, the LCD screen will display "CHANGING". If the icon "static" on the top of screen shows without blink, it means phone has already used the static IP.

### 2.2.3. DHCP mode

Press the numeric key 2 and hold till the LCD screen displays "ARE YOU SURE". Press the  key, the LCD screen will display "CHANGING" and this VoIP phone is trying to switch to DHCP mode. If the icon "DHCP" on the top of the screen keeps blink, it shows that the phone is trying to access the DHCP server., and the IP is 0.0.0.0 if you press  key to display the current IP; if the icon "DHCP" is showed without blink, it means that the phone has already gotten IP from DHCP server.

## 3. Basic Functions

### 3.1. Basic operation

#### 3.1.1. Accepting a call

There are four methods to accept an incoming call:

- Pick up handset to accept incoming calls.

- Press the  button

- If you need switch from a hands-free call to handset, please pick up the handset directly.

- If you need switch from a handset call to hands-free, please press the  button, and then hang up the handset.

#### 3.1.2. Making a call

- Quick-dialing

In idle mode, input the called number, and press # key or  button, phone will dial the call and use hands-free automatically.

- Use handset

Pick up the handset, and the LCD screen will display “**PLEASE DIAL**” and you will hear dialing tone at the same time, then input the phone number and end by the # button. When you hear long ring “du, du...” from handset and the LCD screen display “**CALLING**”, the call is through. Hang up the handset to end the call.


- Use hands-free

Press the  button and the LCD screen will display “**PLEASE DIAL**” and you will hear dialing tone at the same time, then input the phone number and end by the # button. When you hear long ring “du, du...” and the LCD screen display “**CALLING**”, the call is through. Press the



button again to end the call.

- Use the phone book

Press the  button then the  button you will enter into the phone book. Press the  button to select your desired contact person, then press the  button to dial the call.

- Use Callers

Press the  key, then select your desired phone number in callers by the  key, and next press the  button to dial the call.

- Use the R/send key

Please pick up or press the  key. After you hear dialing tone, please press the  key to dial the last phone number. Note: after you reboot the phone, the phone will delete callers and Redial will be invalid.

### 3.1.3. Ending a call

- Hangs up by handset onhook

- Hangs up by press  when in hands-free

- Hangs up a call in call waiting state.

If you are in call waiting state, you could press # key to hang up the current call, and switch to the other call to keep talking. Note: Pressing # key will not hang up if there is only one call currently.

### 3.1.4. Transferring a call

Call transfer has several ways to realize:

1. When A talks to B, B may press the  key and dial C phone number. After B talks to C ( or B hear alert from C ), B presses the  key, then B hangs up, and A will get through to C.
2. When A is talking with B, C calls B, B may press the  key to hold A, and talk to C. Then B presses the  key, A will get through to C.
3. When A talks to B, B presses the  key, dial C phone number and # key, then hang up and A will get through to C.

1 and 2 are attended transfer; 3 is blind transfer.

Notice to VoIP Phone Carrier: Your VoIP phone server need support FRC3515, or else transferring can not work.

### 3.1.5. Calling Hold and 3 ways call

There are two modes to enjoy hold function:

1. Press the  key during a call, and the call will be on hold. While a call is on hold, you can establish another call by dialing your desired number and confirm it by the # button. Pressing the  key again you will resume the first call. By using hold function, you can talk with only one

party; the other party who is on hold can't talk with you. If you press the \* button or  key you will enter into **3 ways call**.

2. If the third party calls you during a call, the LCD screen will display the incoming call number.

Press the  key to hold the first call, and then you can talk with the third party. By using hold function, you can talk with only one party; the other party who is on hold can't talk with you. If you press # key, phone will hang up the first call, and then accept the new incoming call.

**Notice:** You must enable the calling waiting or else calling hold can't work.

### 3.1.6. Callers


The VoIP phone maintains lists of missed, received, and dialed calls. Each list can contain up to 100 entries. If the call list capacity is full, new call will replace the first call. If you stop power supply or restart the phone, the record will disappear.

- **Missed Calls**

Press the  key, and then the  key, till the LCD screen display "**MISSED**".

Press the  key, the LCD screen will display the missed call number and sequence numbers of the missed call.


You can press the  key to dial this phone number, you also press UP/DOWN key to

browse the other missed calls or you can press the  key again, the LCD screen will display the time of the missed calls. If there is no one missed calls, the LCD will display "**LIST IS EMPTY**".

- **Received Calls**


Press the  key, and then the  key, till the LCD screen display "**RECEIVED**". Press ENTER key, the LCD screen will display the received call number and sequence number of the received call.

You can press the  key to dial this phone number, you also press  key to

browse the other received calls or you can press the  key again, the LCD screen will show the time of the received call. If there is no one received call, the LCD will display "**LIST IS EMPTY**".

- **Dialed calls**

Press the  key, and then the  key, till the LCD screen display

"OUTGOING". Press  key, the LCD screen will display the phone number and sequence number of the dialed call. You can press the  key to dial this phone number, or press the  key to browse all record of the dialed calls. If there is on one dialed calls, the LCD will display "LIST IS EMPTY".

## 3.2. The high-level operation

This VoIP Phone provides more advanced functions after setting at the permission scope of SIP server.

### 3.2.1. Special Keys

- **Realize Secondary Dial by Dialing for only one time**

When you make secondary dial in off-hook/handsfree/standby pre-input mode, press



key to postpone input, and screen display will show--. One --stands for 2 seconds. For example, you input 123--45, the phone will send DTMF(45) 2 seconds after the phone call 123. 123-----45 will make phone send DTMF(45) at 6 seconds interval.

- **MWI(Message Waiting Indication)**

When a new voicemail coming, LED on the phone will flash. You can press the **MWI** key to listen new voicemail if you configure mwi number

### 3.2.2. Call pickup

Call pickup is implemented by simulating pickup function of PBX. it's that, when A calls B, B rings but no answer, at this moment, C can hook off and input an appointed prefix plus B's number, pick up A's call and talk with A

The following chart shows how to configure an appointed prefix in dial peer to have call pick up function.

Number	Destination	Port	Mode	Alias	Suffix	Del Length
*1*T	0.0.0.0	5060	SIP	rep:pickup	no suffix	3

\*1\* means appointed prefix code. After making the above configuration, C can dial \*1\* plus B's phone number to pick up A's call. User can set prefix in random, in the case of no affecting current dialing rules.

### 3.2.3. join call

When B is calling C, A can join in the existing call by inputing an appointed prefix numbers plus B or C number, if B or C also supports join call

The following chart shows how to configure an appointed prefix in dialpeer to have join call function.

Number	Destination	Port	Mode	Alias	Suffix	Del Length
*2*T	0.0.0.0	5060	SIP	rep:joincall	no suffix	3

\*2\* means appointed prefix code. After making the above configuration, A can dial \*2\* plus B or C number to join B and C's call, . User can set prefix in random, in the case of no affecting current dialing rules.

### 3.2.4. redial/unredial

If B is in busy line when A calls B, A will get notice: busy, please hang up. If A want to connect B as soon as B is in idle, he can use redial function at the moment and he can dials an appointed prefix number plus B's number to realize redial function.

What is redial function? A can't not build a call with B when B is in busy ,then A will subscribe B's calling mode at 60 second intervals. once B is available, A will get reminder of rings to hook off, while A hooks off, A will call B automatically. If at this time A is occupied temporarily and unwilling to contact B, A also can cancel the redial function by dialing an appointed prefix plus B's number before making the redial function.

Number	Destination	Port	Mode	Alias	Suffix	Del Length
*3*T	0.0.0.0	5060	SIP	rep:redial	no suffix	3
*4*T	0.0.0.0	5060	SIP	rep:unredial	no suffix	3

\*3\* is appointed prefix code. After making the above configuration, A can dial

\*3\* plus B'phone number to make the redial function.

\*4\* is appointed prefix code. After configuration, A can dial \*4\* to cancel redial function.

User can set prefix in random, in the case of no affecting current dialing rules.

### 3.2.5. click to dial

When user A browses in an appointed Web page, user A can click to call user B via a link (this link to user B), then user A's phone will ring, after A hooks off, the phone will dial to B.

## 4. Setting

### 4.1. Setting methods

VoIP Phone is different from the traditional phone; it need be set to make it active. If your VoIP service provider asks you to set this phone, you can do it easily according to the following methods. This VoIP Phone can be set via three different setting methods:

The phone key. The initial password is 123 for setting via phone key.

The web browser on PC

Telnet

This Manual will tell you about the setting methods via the web browser on PC.

### 4.2. Setting via Web Browse

When this phone and your PC are connected to your network, enter the IP address of the wan port in this phone as the URL (e.g. http://xxx.xxx.xxx.xxx/ or http://xxx.xxx.xxx.xxx:xxxx/).

If you do not know the IP address, you can look it up on the phone's display by pressing the key "SYSINFO".

After you enter the IP address, you will see the following web interface.

**Username:**   
**Password:**

This phone provides different two privileges for different users to set it. The two privileges are guest and administrator respectively. In guest privilege, user can see but not modify Register/Proxy Sever Addresses and ports of SIP, advance SIP and lax2. In administrator privilege, user can see and modify all setting parameters.

Default value in guest privilege

Username: guest

Password: guest

Default value in Administrator privilege

Username: admin

Password: admin

Input username and password, click "logon", and you will enter setting web interface.

There is a selection menu on the left side of the web interface. Click on the desired submenu; the current settings of this submenu will be displayed in the larger field on the right. You can now modify and store the values by using mouse and keyboard of your PC. To save the changes, click on the submenu "maintenance" and then click the "config" button and the "Save" button on the right field.

## 4.3. Configuration via WEB

### 4.3.1. BASIC

#### 4.3.1.1. Status

BASIC		
<span>STATUS</span>   <span>WIZARD</span>   <span>CALL LOG</span>   <span>MMI SET</span>		
<b>Network</b>		
Connect Mode	DHCP	
MAC Address	00:0e:10:00:7e:72	
IP Address	192.168.1.15	
Gateway	192.168.1.1	
<b>Phone Number</b>		
SIP LINE 1	@ :5060	Unapplied
SIP LINE 2	@ :5060	Unapplied
Version: VOIP PHONE V1.7.60.47 Mar 30 2009 16:39:26		

Status	
Field name	Explanation
Network	Shows the configuration information on WAN and LAN port, including the connect mode of WAN port (Static, DHCP, PPPoE), MAC address, the IP address of WAN port and LAN port, ON or OFF of DHCP mode of LAN port.
Phone Number	Shows the phone numbers provided by the SIP LINE 1-2 servers. The last line shows the version number and issued date.

#### 4.3.1.2. Wizard

### BASIC

STATUS	WIZARD	CALL LOG	MMI SET
<b>Network Mode Select</b>			
Static IP MODE	<input type="radio"/>		
DHCP MODE	<input checked="" type="radio"/>		
PPPoE MODE	<input type="radio"/>		
<input type="button" value="BACK"/>		<input type="button" value="NEXT"/>	

Wizard	
Field Name	Explanation
Static IP MODE	<input checked="" type="radio"/>
DHCP MODE	<input type="radio"/>
PPPoE MODE	<input type="radio"/>
<p>Please select the proper network mode according to the network condition. VI2006 provide three different network settings:</p> <ul style="list-style-type: none"> <li>● Static: If your ISP server provides you the static IP address, please select this mode, then finish Static Mode setting. If you don't know about parameters of Static Mode setting, please ask your ISP for them.</li> <li>● DHCP: In this mode, you will get the information from the DHCP server automatically; need not to input this information artificially.</li> <li>● PPPoE: In this mode, your must input your ADSL account and password.</li> </ul> <p>You can also refer to 3.2.1 Network setting to speed setting your network.</p>	
<p>Choose Static IP MODE, click <b>【NEXT】</b> can config the network and SIP(default SIP1)easily, also can browse them too. Click <b>【BACK】</b> can return to the last page.</p>	
<b>Static IP Set</b>	
Static IP Address	192.168.1.179
Netmask	255.255.255.0
Gateway	192.168.1.1
DNS Domain	
Primary DNS	202.96.134.133
Alter DNS	202.96.128.68
Static IP Address	Input the IP address distributed to you.
Netmask	Input the Netmask distributed to you.
Gateway	Input the Gateway address distributed to you.
DNS Domain	Set DNS domain postfix. When the domain which you inputted can not be parsed, phone will automatically add this domain to the end of the domain which you inputted before and parse it again.

Primary DNS	Input your primary DNS server address.
Alter DNS	Input your standby DNS server address.
<b>SIMPLE SIP SET</b>	
Display Name	<input type="text"/>
Server Address	192.168.1.2
Server Port	5060
User Name	2113
Password	••••
Phone Number	2113
Enable Register	<input checked="" type="checkbox"/>
Display Name	If user set the display name, callee will show this display name.
Server Address	Input your SIP server address.
Server Port	Set your SIP server port.
User Name	Input your SIP register account name.
Password	Input your SIP register password.
Phone Number	Input the phone number assigned by your VOIP service provider.
Enable Register	Start to register or not by selecting it or not.
<b>WAN</b>	
Connect Mode	Static
Static IP Address	192.168.1.179
Gateway	192.168.1.1
<b>SIP</b>	
Register Server	192.168.1.2
Account/User Name	2113
PhoneNumber	2113
Register	ON
<input type="button" value="BACK"/> <span style="margin-left: 200px;"><input type="button" value="Finish"/></span>	
<p>Display detailed information that you manual config.          Choose DHCP MODE, click <b>【NEXT】</b> to config simple SIP(default SIP1). You can browse it too. Click <b>【BACK】</b> to return to the last page. Like Static IP MODE。          Choose PPPoE MODE, click <b>【NEXT】</b> to config the PPPoE account/password and SIP(default SIP1). You can browse it too. Click <b>【BACK】</b> to return to the last page. Like Static IP MODE。</p>	
<b>PPPOE Set</b>	
PPPOE Server	ANY
Username	user123
Password	••••••••
PPPoE Server	It will be provided by ISP.
Username	Input your ADSL account.
Password	Input your ADSL password.
<p>Notice: Click <b>【Finish】</b> button after finish your setting, IP Phone will save the setting automatically and reboot. After reboot, you can dial by the SIP account.</p>	

### 4.3.1.3. Call Log

You can look up all the outgoing calls through this page.

**BASIC**

STATUS | WIZARD | CALL LOG | **MMI SET**

**Call information**

Start Time	Last Time	Called Number
SEP 18 14:02	0	sip:123@1

**Call Log**

Field name	explanation
Start Time	Display the start time of the outgoing call
Last Time	Display the conversation time of the outgoing call.
Called Number	Display the account/protocol/line of the outgoing call.

#### 4.3.1.4. MMI SET

**BASIC**

STATUS | WIZARD | CALL LOG | **MMI SET**

**LANGUAGE SELECTION**

Language Set: English

**Greeting Message Set**

Greeting Message: VOIP PHONE

APPLY

Version: VOIP PHONE V1.7.60.47 Mar 30 2009 16:39:26

**MMI SET**

Field name	explanation
Language Set	Set the language of phone, English is default.

#### 4.3.2. Network

##### 4.3.2.1. WAN Config

**NETWORK**

WAN | QOS | SERVICE PORT | **SNTP**

**WAN Status**

Active IP	192.168.1.23
Current Netmask	255.255.255.0
Current Gateway	192.168.1.1
MAC Address	00:0e:10:00:66:10

**WAN Setting**

Static  DHCP  PPPOE

APPLY

<b>WAN Config</b>	
Field Name	explanation
Active IP	192.168.1.23
Current Netmask	255.255.255.0
Current Gateway	192.168.1.1
MAC Address	00:0e:10:00:66:10
Active IP	The current IP address of the phone.
Current Netmask	The current Netmask address.
MAC Address	The current MAC address of the phone.
Current Gateway	The current Gateway IP address.
Get MAC Time	Shows the time of getting MAC address
<b>WAN Setting</b>	
Static <input checked="" type="radio"/> DHCP <input type="radio"/> PPPOE <input type="radio"/>	
Please select the proper network mode according to the network condition. VI2006 provide three different network settings: <ul style="list-style-type: none"> <li>● Static: If your ISP server provides you the static IP address, please select this mode, then finish Static Mode setting. If you don't know about parameters of Static Mode setting, please ask your ISP for them.</li> <li>● DHCP: In this mode, you will get the information from the DHCP server automatically; need not to input this information artificially.</li> <li>● PPPoE: In this mode, your must input your ADSL account and password. You can also refer to 3.2.1 Network setting to speed setting your network.</li> </ul>	
Static IP Address	192.168.1.179
Netmask	255.255.255.0
Gateway	192.168.1.1
DNS Domain	
Primary DNS	202.96.134.133
Alter DNS	202.96.128.68
Auto DNS	<input checked="" type="checkbox"/>
If you use static mode, you need set it.	
IP Address	Input the IP address distributed to you.
Netmask	Input the Netmask distributed to you.
Gateway	Input the Gateway address distributed to you.
DNS Domain	Set DNS domain postfix. When the domain which you inputted can not be parsed, phone will automatically add this domain to the end of the domain which you inputted before and parse it again.
Primary DNS	Input your primary DNS server address.
Alter DNS	Input your standby DNS server address.
PPPOE Server	ANY
Username	user123
Password	*****
If you uses PPPoE mode, you need to make the above setting.	
PPPoE Server	It will be provided by ISP.
Username	Input your ADSL account.
Password	Input your ADSL password.
Notice: <ol style="list-style-type: none"> <li>1) Click "Apply" button after finishe your setting, IP Phone will save the setting automatically and new setting will take effect.</li> <li>2) If you modify IP address, the web will not response by the old IP address. Your need</li> </ol>	

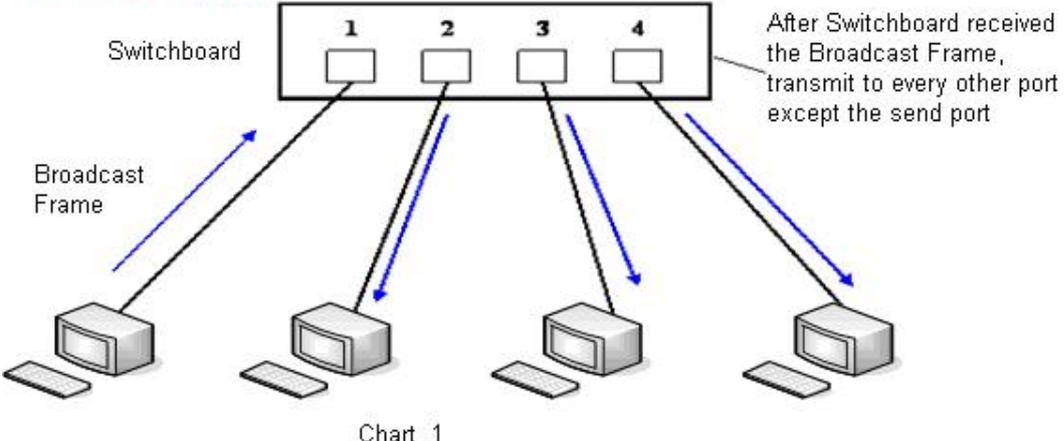
input new IP address in the address column to logon in the phone.

3) If networks ID which is distributed by DHCP server is same as network ID which is used by LAN of system, phone will use the DHCP IP to set WAN, and modify LAN's networks ID(for example, system will change LAN IP from 192.168.10.1 to 192.168.11.1) when phone uses DHCP client to get IP in startup; if phone uses DHCP client to get IP in running status and network ID is also same as LAN's, phone will refuse to accept the IP to configure WAN.

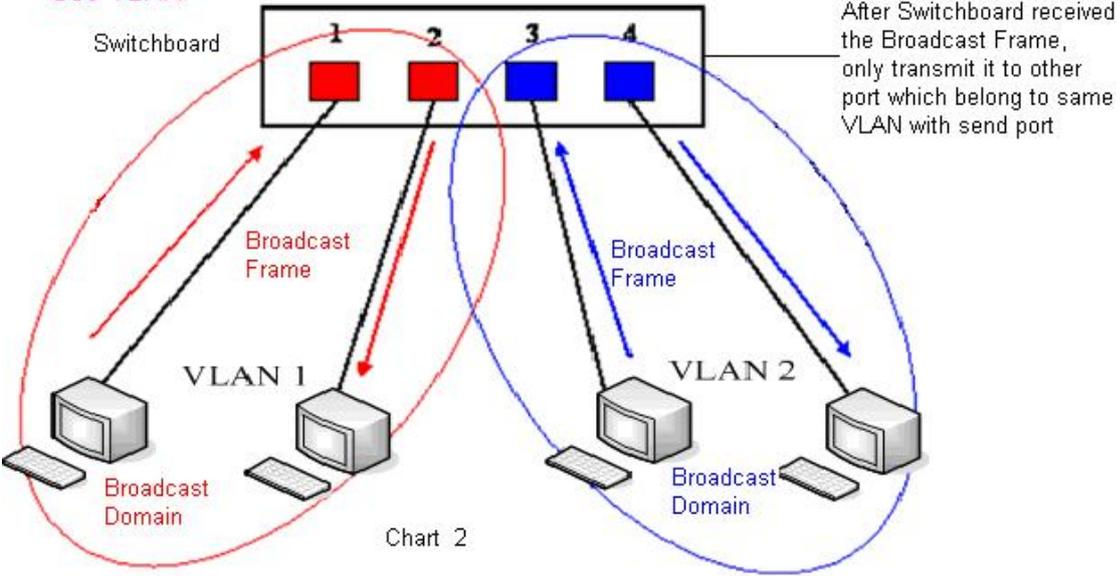
**4.3.2.2. Qos Config**

The VOIP phone support 802.1Q/P protocol and DiffServ configuration. VLAN functionality can use different VLAN IDs by setting signal/voice VLAN and data VLAN. The VLAN application of this phone is very flexible.

Do not use VLAN



Use VLAN



In chart 1, there is a layer 2 switch without setting VLAN. Any broadcast frame will be transmitted to the other ports except the send port. For example, a broadcast information is sent out from port 1 then transmitted to port 2,3and 4.

In chart 2, red and blue indicate two different VLANs in the switch, and port 1 and port 2 belong to red VLAN, port 3 and port 4 belong to blue VLAN. If a broadcast frame is sent out from port 1, switch will transmit it to port 2, the other port in the red VLAN and not transmit it to port3 and port 4 in blue VLAN. By this means, VLAN divide the broadcast domain via restricting the range of broadcast frame transmission.

Note: chart 2 use red and blue to identify the different VLAN, but in practice, VLAN uses different VLAN IDs to identify.

## NETWORK

WAN
QOS
SERVICE PORT
SNTP

### QoS Set

VLAN Enable

<input checked="" type="checkbox"/> VLAN ID Check Enable	Voice/Data VLAN differentiated	Undifferentiated <span style="font-size: small;">▼</span>
<input type="checkbox"/> DiffServ Enable	DiffServ Value	0x   b8
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID
		254 (0 - 4095)

QoS Configuration	
Field name	explanation
VLAN Enable	Before select it to enable VLAN, you need enable Bridge mode in LAN config.
VLAN ID Check Enable	Enable VLAN ID check by selecting it. After enable VLAN ID check, if VLAN ID of a data package is not the same with the phone's or a data package do not have VLAN ID, the data package will be discarded.
Voice/Data VLAN differentiated	After enable VLAN, system will set packets with different type of VLAN ID. Undifferentiated means after using VLAN, both VoIP packets and other data packets will use the voice VLAN ID; tag differentiated means after using VLAN, VoIP(signal and voice) packets will add voice VLAN ID, and other data packets will add data VLAN ID; data untagged means after using VLAN, only VoIP packets will add voice VLAN ID. Other data packets will not use VLAN.
DiffServ Enable	Select it or not to Enable or disable DiffServ.
DiffServ Value	Set DiffServ value, the common value is 0x00.
Voice 802.1P Priority	Specify 802.1P Priority of voice/signal data package.
Data 802.1P Priority	Set 802.1p of data VLAN. Non-VoIP data (such as http, telnet, ping etc) will use this value to set VLAN package.
Voice VLAN ID	Set VLAN ID of voice/signal data package.
Data VLAN ID	Set 802.1q of data VLAN ID. Non-VoIP data (such as http, telnet, ping etc) will use this value to set VLAN package.
<b>NOTICE:</b> <ol style="list-style-type: none"> <li>1) Startup VLAN, if set Voice/Data VLAN differentiated as Undifferentiated, all packets will use the Voice VLAN ID as the tag.</li> <li>2) Startup VLAN, if set Voice/Data VLAN differentiated as tag differentiated and disable the DiffServ, then system will not distinguish the voice and data, all packets will use the Voice VLAN ID as the tag.</li> <li>3) Startup VLAN, if set Voice/Data VLAN differentiated as tag differentiated and enable the DiffServ, then system will distinguish the voice and data and add the VLAN ID each other.</li> <li>4) Startup VLAN, if set Voice/Data VLAN differentiated as data untagged, then the packet of the signal/voice will use the Voice VLAN ID as the tag, but the data packets will not take the VLAN tag.</li> <li>5) If Disable the VLAN, regardless to set the Voice/Data VLAN differentiated or not, all packets will not take the VLAN tag; If enable the DiffServ, all packets will only take</li> </ol>	

the DiffServ value.

6) user need notice, enable the VLAN ID Check Enable that is default, If enable it, the phone will match the VLAN ID strictly. When others' VLAN ID mismatch with us, the packets will discard. Contrarily, the phone will accept the packets with the distinct VLAN ID.

7) You must gain the IP with the Static mode when you set VLAN, otherwise can't gain the IP in the VLAN and also can not dial with point to point.

**4.3.2.3. Service Port**

You can set the port of telnet/HTTP/RTP by this page.

NETWORK

WAN
QOS
SERVICE PORT
SNTP

**Service Port**

HTTP Port	<input type="text" value="80"/>
Telnet Port	<input type="text" value="23"/>
RTP Initial Port	<input type="text" value="10000"/>
RTP Port Quantity	<input type="text" value="200"/>

If modify HTTP or Telnet port,you'd better set it more than 1024,then restart.

SERVICE PORT	
Field name	explanation
HTTP Port	set web browse port, the default is 80 port, if you want to enhance system safety, you'd better change it into non-80 standard port; Example: The IP address is 192.168.1.70. and the port value is 8090, the accessing address is http://192.168.1.70:8090
Telnet Port	Set Telnet Port, the default is 23. You can change the value into others. Example: The IP address is 192.168.1.70. the telnet port value is 8023, the accessing address is telnet 192.168.1.70 8023
RTP Initial Port	Set the RTP Initial Port. It is dynamic allocation.
RTP Port Quantity	Set the maximum quantity of RTP Port, the default is 200.
<p><b>Notice:</b></p> <ol style="list-style-type: none"> <li>1) You need save the configuration and reboot the phone after set this page.</li> <li>2) If you modify the port of Telnet and HTTP, you would better set the value more than 1024 because the port value less than 1024 is system port reserved.</li> <li>3) if you set 0 for the HTTP port, it will disable HTTP service.</li> </ol>	

**4.3.2.4. SNTP**

Setting time zone and SNTP (Simple Network Time Protocol) server according to your location, you can also manually adjust date and time in this web page.

## NETWORK

<b>WAN</b>	<b>QOS</b>	<b>SERVICE PORT</b>	<b>SNTP</b>	
<b>SNTP Time Set</b>				
Server	<input type="text" value="209.81.9.7"/>			
Time Zone	<input type="text" value="( GMT+08:00)Beijing,Chongqing,Hong Kong,Urumqi"/> <input type="button" value="v"/>			
Time Out	<input type="text" value="60"/>	(seconds)		
12 Hours Systems	<input type="checkbox"/>			
SNTP	<input checked="" type="checkbox"/>			
<input type="button" value="APPLY"/>				
<b>Daylight Timeset</b>				
Enable Daylight	<input type="checkbox"/>			
Time shift (minutes)	<input type="text" value="60"/>			
Time Zone	Start Date	End Date		
Month	<input type="text" value="March"/> <input type="button" value="v"/>	<input type="text" value="October"/> <input type="button" value="v"/>		
Week	<input type="text" value="5"/> <input type="button" value="v"/>	<input type="text" value="5"/> <input type="button" value="v"/>		
Day	<input type="text" value="Sunday"/> <input type="button" value="v"/>	<input type="text" value="Sunday"/> <input type="button" value="v"/>		
Hour	<input type="text" value="2"/>	<input type="text" value="2"/>		
Minute	<input type="text" value="0"/>	<input type="text" value="0"/>		
<input type="button" value="APPLY"/>				

<b>SNTP</b>	
<b>Field name</b>	<b>explanation</b>
Server	Set SNTP Server IP address.
Time Zone	Select the Time zone according to your location.
Time Out	Set the time out, the default is 60 seconds.
12 Hours Systems	Swich the time mechanism between 12 hours and 24 hours. Default is 24 hours mode
SNTP	Select the SNTP, and click Apply to make the SNTP Times effective.
Enable Daylight	Enable daylight saving time
Time shift(minutes)	Setup the variety length
Month	Setup stat and end month
Week	Setup start and end week
Day	Setup start and end day
Hour	Setup start and end hours
Minute	Setup start and end minutes
Year	<input type="text"/>
Months	<input type="text"/>
Day	<input type="text"/>
Hour	<input type="text"/>
Minute	<input type="text"/>
<input type="button" value="APPLY"/>	
Notice: You need specify the above all items.	

### 4.3.3. VOIP

#### 4.3.3.1. SIP Config

Set your SIP server in the following interface.

## VOIP

SIP	STUN	DIAL PEER	
<b>SIP Line Select</b>			
SIP 1 ▼		Load	
<b>Basic Setting</b>			
Register Status	Registered	Display Name	
Server Name		Proxy Server Address	
Server Address	192.168.1.2	Proxy Server Port	
Server Port	5060	Proxy Username	
Account Name	111	Proxy Password	
Password	•••	Domain Realm	
Phone Number	111	Enable Register <input checked="" type="checkbox"/>	
APPLY			
Advanced Set			
<b>Advanced SIP Setting</b>			
Register Expire Time	60 seconds	Forward Type	Off ▼
NAT Keep Alive Interval	60 seconds	Forward Phone Number	
User Agent	Voip Phone 1.0	Server Type	COMMON ▼
Signal Key		DTMF Mode	DTMF_RFC2833 ▼
Media Key		RFC Protocol Edition	RFC3261 ▼
Local Port	5060	Transport Protocol	UDP ▼
Ring Type	Type 10 ▼	RFC Privacy Edition	NONE ▼
Subscribe Expire Time	300 seconds	Transfer Expire Time	0 seconds
Conference Number	12121	Enable Conference Number	<input type="checkbox"/>
Enable DNS SRV	<input type="checkbox"/>	Enable Displayname Quote	<input type="checkbox"/>
Enable Subscribe	<input type="checkbox"/>	Click To Talk	<input type="checkbox"/>
Enable Keep Authentication	<input type="checkbox"/>	Signal Encode	<input type="checkbox"/>
NAT Keep Alive	<input checked="" type="checkbox"/>	Rtp Encode	<input type="checkbox"/>
Enable Via rport	<input checked="" type="checkbox"/>	Enable Session Timer	<input type="checkbox"/>
Enable PRACK	<input type="checkbox"/>	Answer With Single Codec	<input type="checkbox"/>
Long Contact	<input type="checkbox"/>	Auto TCP	<input type="checkbox"/>
Enable URI Convert	<input checked="" type="checkbox"/>	Enable Strict Proxy	<input type="checkbox"/>
Dial Without Register	<input type="checkbox"/>	Enable GRUU	<input type="checkbox"/>
Ban Anonymous Call	<input type="checkbox"/>		
APPLY			

SIP Config	
Field name	explanation
<b>SIP Line Select</b>	
SIP 1 ▼ <span style="float: right;">Load</span>	
Choose line to set info about SIP, <span style="color: red;">there are 2 lines to choose</span> . You can switch by <b>【Load】</b> button.	
Register Status	Shows if the phone has been registered the SIP server or not; or so, show Unapplied;
Server Name	Set the server name.
Server Address	Input your SIP server address.
Server Port	Set your SIP server port.
Account Name	Input your SIP register account name.
Password	Input your SIP register password.

Phone Number	Input the phone number assigned by your VoIP service provider. Phone will not register if there is no phone number configured.
Display Name	Set the display name.
Proxy Server Address	Set proxy server IP address ( Usually, Register SIP Server configuration is the same as Proxy SIP Server. But if your VoIP service provider give different configurations between Register SIP Server and Proxy SIP Server, you need make different settings.)
Proxy Server Port	Set your Proxy SIP server port.
Proxy Username	Input your Proxy SIP server account.
Proxy Password	Input your Proxy SIP server password.
Domain Realm	Set the sip domain if needed, otherwise this VoIP phone will use the Register server address as sip domain automatically. (Usually it is same with registered server and proxy server IP address).
Enable Register	Start to register or not by selecting it or not.
Register Expire Time	Set expire time of SIP server register, default is 60 seconds. If the register time of the server requested is longer or shorter than the expire time set, the phone will change automatically the time into the time recommended by the server, and register again.
NAT Keep Alive Interval	Set examining interval of the server, default is 60 seconds
User Agent	Set the user agent if have, the default is VoIP Phone 1.0
Signal Key	Set the key for signal encryption
Media Key	Set the key for RTP encryption
Local port	Set sip port of each line
Ring type	Set ring type of each line
Subscribe Expire Time	Set the interval of Subscribe.
Conference Number	Set the server conference number to jion the the room
Enable DNS SRV	Support DNS looking up with _sip.udp mode
Enable Subscribe	Enable Subscribe.
Enable Keep Authentication	Enable/Disable Keep Authentication.
NAT Keep Alive	Enable/Disable keeps NAT of SIP alive. If some server refuse to register with too short interval time, and has no packets sending to device in private network to keep NAT alive, user could set this function ON. It need set the keep alive interval time less than the NAT server's.
Enable Via rport	Enable/Disable system to support RFC3581. Via rport is special way to realize SIP NAT.
Enable PRACK	Enable or disable SIP PRACK function, suggest use the default config.
Long Contact	Set more parameters in contact field; connection with SEM server
Enable URI Convert	Convert # to %23 when send the URI.
Dial Without Register	Set call out by proxy without registration;
Ban Anonymous Call	Set to ban Anonymous Call;
Forward Type	<p>Select call forward mode, the default is Off</p> <ul style="list-style-type: none"> <li>● Off: Close down calling forward</li> <li>● Busy: If the phone is busy, incoming calls will be forwarded to the appointed phone.</li> <li>● No answer: If there is no answer, incoming calls will be forwarded to the appointed phone.</li> <li>● Always: Incoming calls will be forwarded to the appoint</li> </ul>

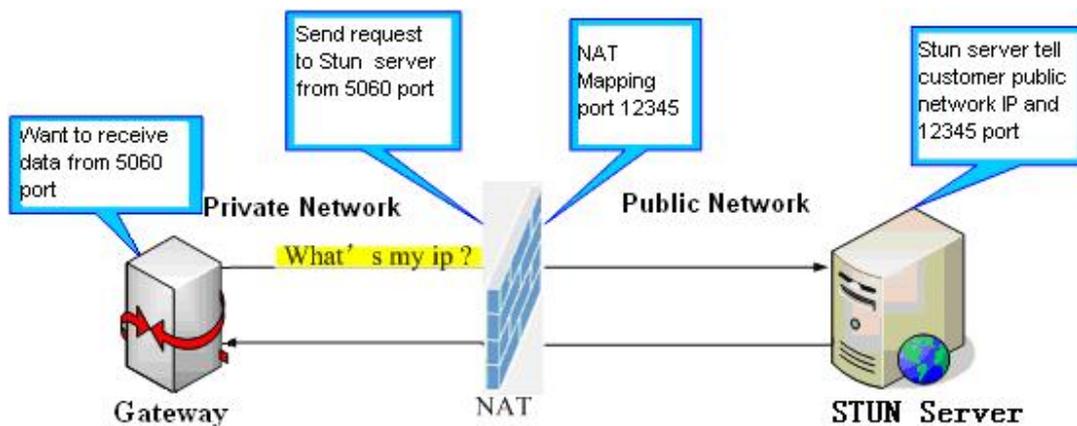
	phone directly. The phone will Prompt the incoming while doing forward.
Forward Phone Number	Appoint your forward phone number.
Server Type	Select the special type of server which is encrypted, or has some unique requirements or call flows.
DTMF Mode	Select DTMF sending mode, there are three modes: <ul style="list-style-type: none"> <li>● DTMF_RELAY</li> <li>● DTMF_RFC2833</li> <li>● DTMF_SIP_INFO</li> </ul> Different VoIP Service providers may provide different modes.
RFC Protocol Edition	Select SIP protocol version to adapt for the SIP server which uses the same version as you select. For example, if the server is CISCO5300, you need to change to RFC2543, else phone may not cancel call normally. System uses RFC3261 as default.
Transport Protocol	Set transport protocols, TCP or UDP;
RFC Privacy Edition	Set Anonymous call out safely; Support RFC3323and RFC3325;
Transfer Expire Time	The phone send bye and end the call as soon as hang up.
Enable Conference Number	Enable/Disable conference
Enable Displayname Quote	Set to make quotation mark to displayname as the phone sends out signal, in order to be compatible with server.
Click to Talk	Set click to Talk ( need practical software support).
Signal Encode	Enable/Disable Signal Encrypt.
RTP Encode	Enable/Disable RTP Encrypt.
Enable Session Timer	Set Enable/Disable Session Timer, whether support RFC4028.It will refresh the SIP sessions.
Answer With Single Codec	Enable/Disable the function when call is incoming, phone replies SIP message with just one codec which phone supports.
Auto TCP	Set to use automatically TCP protocol to guarantee usability of transport as message is above 1300 byte
Enable Strict Proxy	Support the special SIP server-when phone recieves the patckets sent from server, phone will use the source IP address, not the address in via field.
Enable GRUU	Set to support GRUU

#### 4.3.3.2. Stun Config

In this web page, you can config SIP STUN.

STUN:

By STUN server, the phone in private network could know the type of NAT and the NAT mapping IP and port of SIP. The phone might register itself to SIP server with global IP and port to realize the device both calling and being called in private network.



### VOIP

SIP | STUN | DIAL PEER

---

#### STUN Set

STUN NAT Transverse	FALSE
STUN Server Addr	<input type="text"/>
STUN Server Port	3478
STUN Effect Time	50 Seconds
Local SIP Port	5060

---

#### Set Sip Line Enable Stun

SIP 1

Use Stun

STUN	
Field name	Explanation
STUN NAT Transverse	Shows STUN NAT Transverse estimation, true means STUN can penetrate NAT, while False means not.
STUN Server Addr	Set your SIP STUN Server IP address
STUN Server Port	Set your SIP STUN Server Port
STUN Effect Time	Set STUN Effective Time. If NAT server finds that a NAT mapping is idle after time out, it will release the mapping and the system need send a STUN packet to keep the mapping effective and alive.
Local SIP Port	Set the SIP port.
Set Sip Line Enable Stun	
SIP 1 <input type="button" value="Load"/>	
Choose line to set info about SIP, There are 2 lines to choose. You can switch by <b>【Load】</b> button.	
Use Stun	Enable/Disable SIP STUN.
<p><b>Notice:</b> SIP STUN is used to realize SIP penetration to NAT. If your phone configures STUN Server IP and Port (default is 3478), and enable SIP Stun, you can use the ordinary SIP Server to realize penetration to NAT.</p>	

### 4.3.3.3. DIAL PEER setting

This functionality offers you more flexible dial rule, you can refer to the following content to know how to use this dial rule. When you want to dial an IP address, the entry of IP addresses is very cumbersome, but by this functionality, you can set number 156 to replace 192.168.1.119 here.

Number	Destination	Port	Mode	Alias	Suffix	Del Length
156	192.168.1.119	5060	SIP	no alias	no suffix	0

When you want to dial a long distance call to Beijing, you need dial an area code 010 before local phone number, but you can also dial number 1 instead of 010 after we make a setting according to this dial rule. For example, you want to dial 01062213123, but you need dial only 162213123 to realize your long distance call after you make this setting.

Number	Destination	Port	Mode	Alias	Suffix	Del Length
1T	0.0.0.0	5060	SIP	rep:010	no suffix	1

To

save the memory and avoid abundant input of user, add the follow functions:

Number	Destination	Port	Mode	Alias	Suffix	Del Length
13xxxxxxxx	0.0.0.0	5060	SIP	add:0	no suffix	0
13[5-9]xxxxxxxx	0.0.0.0	5060	SIP	add:0	no suffix	0

1、x Match any single digit that is dialed.

If user makes the above configuration, after user dials 11 digit numbers started with 13, the phone will send out 0 plus the dialed numbers automatically.

2、[] Specifies a range that will match digit. It may be a range, a list of ranges separated by commas, or a list of digits.

If user makes the above configuration, after user dials 11 digit numbers started with from 135 to 139, the phone will send out 0 plus the dialed numbers automatically.

Use this phone you can realize dialing out via different lines without switch in web interface.

## VOIP

SIP
STUN
DIAL PEER

### Dial Peer Table

Number	Destination	Port	Mode	Alias	Suffix	Del Length

### Add Dial Peer

Phone Number	<input type="text"/>
Destination (optional)	<input type="text"/>
Port(optional)	<input type="text"/>
Alias(optional)	<input type="text"/>
Call Mode	SIP <input type="button" value="v"/>
Suffix(optional)	<input type="text"/>
Delete Length (optional)	<input type="text"/>

### Dial Peer Option

<input type="button" value="v"/>	<input type="button" value="Delete"/> <input type="button" value="Modify"/>
----------------------------------	---

## DIAL PEER

Field name	explanation																																			
Phone number	There are two types of matching conditions: one is full matching, the other is prefix matching. In the Full matching, you need input your desired phone number in this blank, and then you need dial the phone number to realize calling to what the phone number is mapped. In the prefix matching, you need input your desired prefix number and T; then dial the prefix and a phone number to realize calling to what your prefix number is mapped. The prefix number supports at most 30 digits																																			
Destination	Set Destination address. This is optional config item. If you want to set peer to peer call, please input destination IP address or domain name. If you want to use this dial rule in SIP2 line, you need input 255.255.255.255 or 0.0.0.2 in it.																																			
Port	Set the Signal port, the default is 5060 for SIP.																																			
Alias	Set alias. This is optional config item. If you don't set Alias, it will show no alias.																																			
<p>Note: There are four types of aliases.</p> <p>1) add: xxx, it means that you need dial xxx in front of phone number, which will reduce dialing number length.</p> <p>2) all: xxx, it means that xxx will replace some phone number.</p> <p>3) del: It means that phone will delete the number with length appointed.</p> <p>4) Rep: It means that phone will replace the number with length and number appointed.</p> <p>You can refer to the following examples of different alias application to know more how to use different aliases and this dial rule.</p>																																				
Call Mode	Select differencnt signal protocol, SIP or IAX2																																			
Suffix	Set suffix, this is optional config item. It will show no suffix if you don't set it.																																			
Delete Length	Set delete length. This is optional config item. For example: if the delete length is 3, the phone will delete the first 3 digits then send out the rest digits. You can refer to examples of different alias application to know how to set delete length.																																			
<p>Introduction of how to set up dial-peer to implement switch between multi- SIP lines</p> <table border="1"> <thead> <tr> <th>Number</th> <th>Destination</th> <th>Port</th> <th>Mode</th> <th>Alias</th> <th>Suffix</th> <th>Del Length</th> </tr> </thead> <tbody> <tr> <td>9T</td> <td>0.0.0.1</td> <td>5060</td> <td>SIP</td> <td>no alias</td> <td>no suffix</td> <td>0</td> </tr> <tr> <td>8T</td> <td>0.0.0.2</td> <td>5060</td> <td>SIP</td> <td>no alias</td> <td>no suffix</td> <td>0</td> </tr> </tbody> </table> <p>9T mapping: If you have registered a SIP1 server and set dial-peer according to the above table, all calls will be sent via SIP1 server when you press the numeric key "9" in front of dialing destination phone numbers.</p> <p>8T mapping: If you have registered a Private SIP2 server and set dial-peer according to the above table, all calls will be sent via SIP2 server when you press the numeric key "8" in front of dialing destination phone numbers.</p> <table border="1"> <thead> <tr> <th>Number</th> <th>Destination</th> <th>Port</th> <th>Mode</th> <th>Alias</th> <th>Suffix</th> <th>Del length</th> </tr> </thead> <tbody> <tr> <td>2T</td> <td>0.0.0.0</td> <td>4569</td> <td>IAX2</td> <td>del</td> <td>no suffix</td> <td>1</td> </tr> </tbody> </table> <p>the rule of 2T means user need to dial the number with prefix 2 if he want to dial via IAX2 server</p>		Number	Destination	Port	Mode	Alias	Suffix	Del Length	9T	0.0.0.1	5060	SIP	no alias	no suffix	0	8T	0.0.0.2	5060	SIP	no alias	no suffix	0	Number	Destination	Port	Mode	Alias	Suffix	Del length	2T	0.0.0.0	4569	IAX2	del	no suffix	1
Number	Destination	Port	Mode	Alias	Suffix	Del Length																														
9T	0.0.0.1	5060	SIP	no alias	no suffix	0																														
8T	0.0.0.2	5060	SIP	no alias	no suffix	0																														
Number	Destination	Port	Mode	Alias	Suffix	Del length																														
2T	0.0.0.0	4569	IAX2	del	no suffix	1																														

### Examples of different alias application

Set by web	explanation	example

<table border="1"> <tr><td>Phone Number</td><td>9T</td></tr> <tr><td>Destination (optional)</td><td>255.255.255.255</td></tr> <tr><td>Port(optional)</td><td></td></tr> <tr><td>Alias(optional)</td><td>del</td></tr> <tr><td>Call Mode</td><td>SIP</td></tr> <tr><td>Suffix(optional)</td><td></td></tr> <tr><td>Delete Length (optional)</td><td>1</td></tr> </table>	Phone Number	9T	Destination (optional)	255.255.255.255	Port(optional)		Alias(optional)	del	Call Mode	SIP	Suffix(optional)		Delete Length (optional)	1	<p>You need set phone number, Destination, Alias and Delete Length. Phone number is XXXT, Destination is 255.255.255.255 and Alias is del. This means any phone No. that starts with your set phone number will be sent via SIP2 line after the first several digits of your dialed phone number are deleted according to delete length.</p>	<p>If you dial “93333”, the SIP2 server will receive “3333”</p>
Phone Number	9T															
Destination (optional)	255.255.255.255															
Port(optional)																
Alias(optional)	del															
Call Mode	SIP															
Suffix(optional)																
Delete Length (optional)	1															
<table border="1"> <tr><td>Phone Number</td><td>2</td></tr> <tr><td>Destination (optional)</td><td></td></tr> <tr><td>Port(optional)</td><td></td></tr> <tr><td>Alias(optional)</td><td>all:33334444</td></tr> <tr><td>Call Mode</td><td>SIP</td></tr> <tr><td>Suffix(optional)</td><td></td></tr> <tr><td>Delete Length (optional)</td><td></td></tr> </table>	Phone Number	2	Destination (optional)		Port(optional)		Alias(optional)	all:33334444	Call Mode	SIP	Suffix(optional)		Delete Length (optional)		<p>This setting will realize speed dial function, after you dialing the numeric key “2”, the number after all will be sent out.</p>	<p>When you dial “2”, the SIP1 server will receive 33334444</p>
Phone Number	2															
Destination (optional)																
Port(optional)																
Alias(optional)	all:33334444															
Call Mode	SIP															
Suffix(optional)																
Delete Length (optional)																
<table border="1"> <tr><td>Phone Number</td><td>8T</td></tr> <tr><td>Destination (optional)</td><td></td></tr> <tr><td>Port(optional)</td><td></td></tr> <tr><td>Alias(optional)</td><td>add:0755</td></tr> <tr><td>Call Mode</td><td>SIP</td></tr> <tr><td>Suffix(optional)</td><td></td></tr> <tr><td>Delete Length (optional)</td><td></td></tr> </table>	Phone Number	8T	Destination (optional)		Port(optional)		Alias(optional)	add:0755	Call Mode	SIP	Suffix(optional)		Delete Length (optional)		<p>The phone will automatically send out alias number adding your dialed number, if your dialed number starts with your set phone number.</p>	<p>When you dial “8309”, the SIP1 server will receive “07558309”</p>
Phone Number	8T															
Destination (optional)																
Port(optional)																
Alias(optional)	add:0755															
Call Mode	SIP															
Suffix(optional)																
Delete Length (optional)																
<table border="1"> <tr><td>Phone Number</td><td>010T</td></tr> <tr><td>Destination (optional)</td><td></td></tr> <tr><td>Port(optional)</td><td></td></tr> <tr><td>Alias(optional)</td><td>rep:008610</td></tr> <tr><td>Call Mode</td><td>SIP</td></tr> <tr><td>Suffix(optional)</td><td></td></tr> <tr><td>Delete Length (optional)</td><td>3</td></tr> </table>	Phone Number	010T	Destination (optional)		Port(optional)		Alias(optional)	rep:008610	Call Mode	SIP	Suffix(optional)		Delete Length (optional)	3	<p>You need set Phone Number, Alias and Delete Length. Phone number is XXXT and Alias is Rep:xxx If your dialed phone number starts with your set phone number, the first digits same as your set phone number will be replaced by the alias number specified and New phone number will be send out.</p>	<p>When you dial “0106228”, the SIP1 server will receive “0086106228”</p>
Phone Number	010T															
Destination (optional)																
Port(optional)																
Alias(optional)	rep:008610															
Call Mode	SIP															
Suffix(optional)																
Delete Length (optional)	3															

<table border="1"> <tr><td>Phone Number</td><td>.147</td></tr> <tr><td>Destination (optional)</td><td></td></tr> <tr><td>Port(optional)</td><td></td></tr> <tr><td>Alias(optional)</td><td></td></tr> <tr><td>Call Mode</td><td>SIP</td></tr> <tr><td>Suffix(optional)</td><td>0011</td></tr> <tr><td>Delete Length (optional)</td><td></td></tr> </table>	Phone Number	.147	Destination (optional)		Port(optional)		Alias(optional)		Call Mode	SIP	Suffix(optional)	0011	Delete Length (optional)		<p>If your dialed phone number starts with your set phone number. The phone will send out your dialed phone number adding suffix number.</p>	<p>When you dial "147", the SIP1 server will receive "1470011"</p>
Phone Number	.147															
Destination (optional)																
Port(optional)																
Alias(optional)																
Call Mode	SIP															
Suffix(optional)	0011															
Delete Length (optional)																

#### 4.3.4. Phone

##### 4.3.4.1. DSP Config

In this page, you can configure voice codec, input/output volume and so on.

**PHONE**

<b>DSP</b>	<b>CALL SERVICE</b>	<b>DIGITAL MAP</b>	<b>PHONE BOOK</b>
<b>DSP Configuration</b>			
First Codec	g711Ulaw64k	Second Codec	g711Alaw64k
Third Codec	g729	Fourth Codec	g723
Fifth Codec	g726-32	Sixth Codec	g722
Handdown Time	200 ms	Default Ring Type	Type 1
Input Volume	3 (1-9)	Output Volume	5 (1-9)
Handfree Volume	5 (1-9)	Ring Volume	5 (1-9)
G729 Payload Length	20ms	Signal Standard	China
G722 Timestamps	160/20ms	G723 Bit Rate	6.3kb/s
VAD	<input type="checkbox"/>		
<b>APPLY</b>			

<b>DSP Configuration</b>	
<b>Field name</b>	<b>explanation</b>
First Codec	The first preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Second Codec	The second preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Third Codec	The third preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Fourth Codec	The fourth preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Fifth Codec	The fifth preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Sixth Codec	The sixth preferential DSP codec: G.711A/u, G.722, G.723, G.729, G.726
Input Volume	Specify Input (MIC) Volume grade.:
Handfree Volume	Specify Handfree Volume grade
G729 Payload Length	Set G729 Payload Length
Handdown Time	Specify the least reflection time of Handdown, the default is 200ms.
Output Volume	Specify Output (receiver) Volume grade.
Ring Volume	Specify Ring Volume grade
G722 Timestamps	160/20ms or 320/20ms is available

G723 Bit Rate	5.3kb/s or 6.3kb/s is available
Default Ring Type	Set up the ring by default
Signal Standard	Select Signal Standard.
VAD	Select it or not to enable or disable VAD. If enable VAD, G729 Payload length could not be set over 20ms.

#### 4.3.4.2. Call Service

In this web page, you can configure Hotline, Call Transfer, Call Waiting, 3 Ways Call, Black List, white list Limit List and so on.

PHONE

DSP
CALL SERVICE
DIGITAL MAP
PHONE BOOK

Call Service Setting

Hot Line	<input type="text"/>	No Answer Time	20 (seconds)
P2P IP Prefix	<input type="text"/>	MWI Number	<input type="text"/>
Enable Call Transfer	<input checked="" type="checkbox"/>	Enable Call Waiting	<input checked="" type="checkbox"/>
Enable Three Way Call	<input checked="" type="checkbox"/>	Accept Any Call	<input checked="" type="checkbox"/>
Auto Answer	<input type="checkbox"/>	Ban Outgoing	<input type="checkbox"/>
Do Not Disturb	<input type="checkbox"/>		

Black List

Black List

Limit List

Limit List

Call Service	
Field name	Explanation
Hotline	Specify Hotline number. If you set the number, you can not dial any other numbers.
No Answer Time	Specify No Answer Time
P2P IP Prefix	Set Prefix in peer to peer IP call. For example: what you want to dial is 192.168.1.119, If you define P2P IP Prefix as 192.168.1., you dial only #119 to reach 192.168.1.119. Default is ".". If there is no "." Set, it means to disable dialing IP.
MWI Number	Set the number to listen voice mail in server.
Enable Call Transfer	Enable Call Transfer by selecting it.
Enable Call Waiting	Enable Call Waiting by selecting it.
Enable Three Way Call	Enable Three Way Call
Accept Any Call	If select it, the phone will accept the call even if the called number is not belong to the phone.
Auto Answer	If select it, the phone will auto answer when there is an incoming call.
Ban Outgoing	If you select Ban Outgoing to enable it, and you can not dial out any number.
Do Not Disturb	Select NO Disturb, the phone will reject any incoming call, the callers will be reminded by busy, but any outgoing call from the phone will work

	well.			
Black List	<p>Set Add/Delete Black list. If user does not want to answer some phone calls, add these phone numbers to the Black List, and these calls will be rejected.</p> <p>x and . are wildcard. x means matching any single digit. for example, 4xxx expresses any number with prefix 4 which length is 4 will be forbidden to dialed out</p> <p>DOT (.) means matching any arbitrary number digit. for example, 6. expresses any number with prefix 6 will be forbidden to dialed out.</p> <p>if user wants to allow a number or a series of number incoming, he may add the number(s) to the list as the white list rule. the configuration rule is -number, for example, -123456, or -1234xx</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td>Black List</td> </tr> <tr> <td>-4119</td> </tr> <tr> <td>.</td> </tr> </table> <p>Means any incoming number is forbidden except for 4119 Note: End with DOT (.) when set up the white list</p>	Black List	-4119	.
Black List				
-4119				
.				
Limit List	<p>Set Add/Delete Limit List. Please input the prefix of those phone numbers which you forbid the phone to dial out. For example, if you want to forbid those phones of 001 as prefix to be dialed out, you need input 001 in the blank of limit list, and then you can not dial out any phone number whose prefix is 001.</p> <p>x and . are wildcard. x means matching any single digit. for example, 4xxx expresses any number with prefix 4 which length is 4 will be forbidden to dialed out</p> <p>. means matching any arbitrary number digit. for example, 6. expresses any number with prefix 6 will be forbidden to dialed out.</p>			
Notice: Black List and Limit List can record at most 10 items respectively.				

#### 4.3.4.3. Digital Map Configuration

This phone supports 4 dial modes:

- 1). End with "#": dial your desired number, and then press #.
- 2). Fixed Length: the phone will intersect the number according to your specified length.
- 3). Time Out: After you stop dialing and waiting time out, system will send the number collected.
- 4). User defined: you can customize digital map rules to make dialing more flexible. It is realized by defining the prefix of phone number and number length of dialing.

In order to keep some users' secondary dialing manner when dialing the external line with pbx, phone can be added a special rule to realize it. so user can dial a number as external line prefix and get the secondary dial tone to keep dial the external number. after finishing dialing, phone will send the prefix and external number totally to ther server.

for example, there is a rule 9,xxxxxxx in the digital map table. after dialing 9, phone will send the secondary dial tone, user may keep going dialing. after finished, phone will call the number which starts with 9, actually the number sent out is 9-digit with 9.

**PHONE**

DSP | CALL SERVICE | DIGITAL MAP | PHONE BOOK

**Digital Map Set**

<input checked="" type="checkbox"/>	End With "#"		
<input type="checkbox"/>	Fixed Length	11	
<input checked="" type="checkbox"/>	Time Out	5	(3--30)

APPLY

**Digital Rule table**

Rules:

	Add	↓	Del
--	-----	---	-----

<b>Digital Map Configuration</b>	
Field name	explanation
End with "#"	Set Enable/Disable the phone ended with "#" dial.
Fixed Length	Specify the Fixed Length of phone ending with.
Time out	Set the timeout of the last dial digit. The call will be sent after timeout.

**Digital Rule table**

Rules:

	Add	↓	Del
--	-----	---	-----

Below is user-defined digital map rule:

- [] Specifies a range that will match digit. May be a range, a list of ranges separated by commas, or a list of digits.
- x Match any single digit that is dialed.
- . Match any arbitrary number of digits including none.
- Tn Indicates an additional time out period before digits are sent of n seconds in length. n is mandatory and can have a value of 0 to 9 seconds. Tn must be the last 2 characters of a dial plan. If Tn is not specified it is assumed to be T0 by default on all dial plans.

RULE
"[1-8]xxx"
"9xxxxxxx"
"911"
"99T4"
"9911x.T4"

[1-8]xxx: Cause extensions 1000-8999 to be dialed immediately  
 9xxxxxxx: Cause 8 digit numbers started with 9 to be dialed immediately  
 911: Cause 911 to be dialed immediately after it is entered.  
 99T4: Cause 99 to be dialed after 4 seconds.  
 9911x.T4: Cause any number started with 9911 to be dialed 4 seconds after dialing ceases.

**Notice:** End with "#", Fixed Length, Time out and Digital Map Table can be used simultaneously, System will stop dialing and send number according to your set rules.

#### 4.3.4.4. Phone Book

You can input the name, phone number and select ring type for each name here.

## PHONE

DSP
CALL SERVICE
DIGITAL MAP
PHONE BOOK

**Phonebook Table**

Index	Name	Number	Type

**Add Phone Book**

Name	<input type="text"/>	<input type="button" value="Add"/>
Number	<input type="text"/>	
Ring Type	Default <input type="button" value="v"/>	

**Phone Book Option**

<input type="button" value="v"/>	<input type="button" value="Delete"/> <input type="button" value="Modify"/>
----------------------------------	---

Phone Book			
Field name	Explanation		
Index	Name	Number	Type
1	ad	23	Default
Shows the detail of current phonebook.			
Name	Shows the name corresponding to the phone number		
Number	Shows the phone number		
Ring Type	Shows the ring type of the incoming call.		
Click "Modify" to change the selected information and click the "Delete" to delete the selected record.			
Notice: the maximum capability of the phonebook is 500 items			

### 4.3.5. Maintenance

#### 4.3.5.1. Auto Provision

## MAINTENANCE

AUTO PROVISION
SYSLOG
CONFIG
UPDATE
ACCOUNT
REBOOT

**Auto Update Setting**

Current Config Version	2.0002
Server Address	<input type="text" value="0.0.0.0"/>
Username	<input type="text" value="user"/>
Password	<input type="password" value="••••"/>
Config File Name	<input type="text"/>
Config Encrypt Key	<input type="text"/>
Protocol Type	FTP <input type="button" value="v"/>
Update Interval Time	1 <input type="text" value="Hour"/>
Update Mode	Disable <input type="button" value="v"/>
<input type="button" value="APPLY"/>	

**Auto Provision**

Field name	explanation
Current Config Version	Show the current config file's version.
Server Address	Set FTP/TFTP/HTTP server IP address for auto update. The

	address can be IP address or Domain name with subdirectory.
Username	Set FTP server Username. System will use anonymous if username keep blank.
Password	Set FTP server Password.
Config File Name	Set configuration file's name which need to update. System will use MAC as config file name if config file name keep blank. For example, 000102030405.。
Config Encrypt Key	Input the Encrypt Key, if the configuration file is encrypted.
Protocol Type	Select the Protocol type FTP、TFTP or HTTP.
Update Interval Time	Set update interval time, unit is hour.
Update Mode	Different update modes: 1. Disable: means no update 2. Update after reboot: means update after reboot. 3. Update at time interval: means periodic update.

#### 4.3.5.2. Syslog Config

Syslog is a protocol which is used to record the log messages with client/server mechanism. Syslog server receives the messages from clients, and classifies them based on priority and type. Then these messages will be written into log by some rules which administrator can configure. This is a better way for log management.

8 levels in debug information:

Level 0---emergency: This is highest default debug info level. Your system can not work.

Level 1---alert: Your system has deadly problem.

Level 2---critical: Your system has serious problem.

Level 3---error: The error will affect your system working.

Level 4---warning: There are some potential dangers. But your system can work.

Level 5---notice: Your system works well in special condition, but you need to check its working environment and parameter.

Level 6---info: the daily debugging info.

Level 7---debug: the lowest debug info. Professional debugging info from R&D person.

At present, the lowest level of debug information send to Syslog is info, debug level only can be displayed on telnet.

**MAINTENANCE**

AUTO PROVISION	SYSLOG	CONFIG	UPDATE	ACCOUNT	REBOOT
<b>Syslog Set</b>					
Server IP	<input type="text" value="0.0.0.0"/>				
Server Port	<input type="text" value="514"/>				
MGR Log Level	None ▾				
SIP Log Level	None ▾				
IAX2 Log Level	None ▾				
Enable Syslog	<input type="checkbox"/>				
<input type="button" value="APPLY"/>					

<b>Syslog Configuration</b>	
Field name	explanation
Server IP	Set Syslog server IP address.
Server Port	Set Syslog server port.
MGR Log Level	Set the level of MGR log.
SIP Log Level	Set the level of SIP log.
IAX2 Log Level	Set the level of IAX2 log.
Enable Syslog	Select it or not to enable or disable syslog.

### 4.3.5.3. Config Setting

## MAINTENANCE

AUTO PROVISION
SYSLOG
CONFIG
UPDATE
ACCOUNT
REBOOT

**Save Configuration**

Press the "Save" button to save the configuration files !

**Backup Configuration**

Save all Network and VoIP settings.

Right Click here to Save as Config File (.txt)

**Clear Configuration**

Press the "Clear" button to Clear the configuration files !

<h3>Config Setting</h3>	
Field name	explanation
Save Config	you can save all changes of configurations. Click the Save button, all changes of configuration will be saved, and be effective immediately. .
Backup Config	Right clicks on "Right click here..." and select "Save Target As..." then you will save the config file in .txt format
Clear Config	user can restore factory default configuration and reboot the phone. If you login as Admin, the phone will reset all configurations and restore factory default; if you login as Guest, the phone will reset all configurations except for VoIP accounts (SIP1-2 and IAX2) and version number.

### 4.3.5.4. Update

You can update your configuration with your config file in this web page.

## MAINTENANCE

AUTO PROVISION
SYSLOG
CONFIG
UPDATE
ACCOUNT
REBOOT

**Web Update**

Select file:   (\*.z,\*.txt,\*.au)

**FTP Update**

Server	<input type="text"/>
Username	<input type="text"/>
Password	<input type="text"/>
File Name	<input type="text"/>
Type	Application update ▾
Protocol	FTP ▾

<h3>Update</h3>	
Field name	explanation
Web Update	Click the browse button, find out the config file saved before or provided by manufacturer, download it to the phone directly, press "Update" to save. You can also update

	downloaded update file, logo picture, ring, mmiset file by web.
Server	Set the FTP/TFTP server address for download/upload. The address can be IP address or Domain name with subdirectory.
Username	Set the FTP server Username for download/upload.
Password	Set the FTP server password for download/upload.
File name	Set the name of update file or config file. The default name is the MAC of the phone, such as 000102030405.
<b>Notice:</b> You can modify the exported config file. And you can also download config file which includes several modules that need to be imported. For example, you can download a config file just keep with SIP module. After reboot, other modules of system still use previous setting and are not lost.	
Type	Action type that system want to execute: 1. Application update: download system update file 2. Config file export: Upload the config file to FTP/TFTP server, name and save it. 3. Config file import: Download the config file to phone from FTP/TFTP server. The configuration will be effective after the phone is reset.
Protocol	Select FTP/TFTP server

#### 4.3.5.5. Account Config

You can add or delete user account, and change the authority of each user account in this web page

**MAINTENANCE**

AUTO PROVISION	SYSLOG	CONFIG	UPDATE	ACCOUNT	REBOOT
----------------	--------	--------	--------	---------	--------

**Set Keyboard Password**

Keyboard Password	...	Set
-------------------	-----	-----

**User Set**

User Name	User Level
admin	Root
guest	General

**Add User**

User Name	<input type="text"/>
User Level	Root <input type="button" value="v"/>
Password	<input type="text"/>
Confirm	<input type="text"/>
<input type="button" value="Submit"/>	

**Account Option**

admin <input type="button" value="v"/>	<input type="button" value="Delete"/>	<input type="button" value="Modify"/>
--	---------------------------------------	---------------------------------------

Account Configuration	
Field name	explanation
Keyboard Password	Set the password for entering the setting menu of the phone by the phone 's key board. The password is digit.

User Name	User Level
admin	Root
guest	General

This table shows the current user existed.

User Name	Set account user name.
User Level	Set user level, Root user has the right to modify configuration, General can only read.
Password	Set the password.
Confirm	Confirm the password.

Select the account and click the **Modify** to modify the selected account, and click the **Delete** to delete the selected account.

General user only can add the user whose level is General.

### 4.3.5.6. Reboot

## MAINTENANCE

AUTO PROVISION
SYSLOG
CONFIG
UPDATE
ACCOUNT
REBOOT

**Reboot Phone**

Press the "Reboot" button to reboot Phone !

If you modified some configurations which need the phone's reboot to be effective, you need click the Reboot, then the phone will reboot immediately.

**Notice:** Before reboot, you need confirm that you have saved all configurations..

### 4.3.6. Security

#### 4.3.6.1. MMI Filter

## SECURITY

MMI FILTER
FIREWALL

**MMI Filter Table**

Start IP	End IP	Option
<b>MMI Filter Table Set</b>		
Start IP	<input type="text"/>	End IP <input type="text"/> <input type="button" value="Add"/>
<b>MMI Filter Table Set</b>		
<input type="checkbox"/> MMI Filter		<input type="button" value="APPLY"/>

#### MMI Filter

User could make some device own IP, which is pre-specified, access to the MMI of the phone to config and manage the phone.

Field name	explanation
<b>MMI Filter Table</b>	
Start IP	End IP
192.168.1.15	192.168.1.20
<input type="button" value="Modify"/> <input type="button" value="Delete"/>	

MMI Filter IP Table list:

MMI Filter Table Set	
Start IP	End IP
Add	
<p>Add or delete the IP address segments that access to the phone. Set initial IP address in the Start IP column, Set end IP address in the End IP column, and click Add to add this IP segment. You can also click Delete to delete the selected IP segment.</p>	
MMI Filter	Select it or not to enable or disable MMI Filter. Click <b>Apply</b> to make it effective.
<p><b>Notice:</b> Do not set your visiting IP outside the MMI filter range, otherwise, you can not logon through the web.</p>	

### 4.3.6.2. Firewall

## SECURITY

MMI FILTER	FIREWALL	NAT	VPN					
<b>Firewall Type</b>								
<input type="checkbox"/> In_access Enable		<input type="checkbox"/> Out_access Enable						
<input type="button" value="APPLY"/>								
<b>Firewall Input Rule Table</b>								
Index	Deny/Permit	Protocol	Src Addr	Src Mask	Des Addr	Des Mask	Range	Port
<b>Firewall Output Rule Table</b>								
Index	Deny/Permit	Protocol	Src Addr	Src Mask	Des Addr	Des Mask	Range	Port
0	deny	ICMP	192.168.1.14	255.255.255.0	192.168.1.118	255.255.255.0	more than	1
<b>Firewall Set</b>								
Input/Output	Input	Src Addr		Deny/Permit	Deny	Des Addr		<input type="button" value="Add"/>
Protocol Type	UDP	Src Mask		Port Range	more than	Des Mask		
<b>Rule Delete</b>								
Input/Output	Input	Index To Be Deleted		<input type="button" value="Delete"/>				

### Firewall Configuration

In this web interface, you can set up firewall to prevent unauthorized Internet users from accessing private networks connected to the Internet (input rule), or prevent unauthorized private network devices from accessing the Internet (output rule). Firewall supports two types of rules: input\_access rule and output\_access rule. Each type supports at most 10 items.

Through this web page, you could set up and enable/disable firewall with input/output rules. System could prevent unauthorized access, or access other networks set in rules for security. Firewall, is also called access list, is a simple implementation of a Cisco-like access list (firewall). It supports two access lists: one for filtering input packets, and the other for filtering output packets. Each kind of list could be added 10 items.

We will give you an instance for your reference.

<input type="checkbox"/> In_access Enable	<input type="checkbox"/> Out_access Enable
---	--

Input/Output	Input	Src Addr			
Deny/Permit	Deny	Des Addr			
Protocol Type	UDP	Src Mask			
Port Range	more than	Des Mask			

Add

Field name	explanation
In_access enable	Select it to Enable in_access rule
out_access enable	Select it to Enable out_access rule
Input/Output	Specify current adding rule by selecting input rule or output rule.
Deny/Permit	Specify current adding rule by selecting Deny rule or Permit rule.
Protocol Type	Filter protocol type. You can select TCP, UDP, ICMP, or IP.
Port Range	Set the filter Port range
Src Addr	Set source address. It can be single IP address, network address, complete address 0.0.0.0, or network address similar to *.**.0
Des Addr	Set the destination address. It can be IP address, network address, complete address 0.0.0.0, or network address similar to *.*.*
Src Mask	Set the source address' mask. For example, 255.255.255.255 means just point to one host; 255.255.255.0 means point to a network which network ID is C type.
Des Mask	Set the destination address' mask. For example, 255.255.255.255 means just point to one host; 255.255.255.0 means point to a network which network ID is C type.

Click the **Add** button if you want to add a new output rule.

#### Firewall Output Rule Table

Index	Deny/Permit	Protocol	Src Addr	Src Mask	Des Addr	Des Mask	Range	Port
0	deny	ICMP	192.168.1.14	255.255.255.0	192.168.1.118	255.255.255.0	more than	1

Then enable out\_access, and click the Apply button.

So when devices execute to ping 192.168.1.118, system will deny the request to send icmp request to 192.168.1.118 for the out\_access rule. But if devices ping other devices which network ID is 192.168.1.0, it will be normal.

#### Rule Delete

Input/Output	Input	Index To Be Deleted			
--------------	-------	---------------------	--	--	--

Delete

Click the **Delete** button to delete the selected rule.

### 4.3.7. Logout

## System Logout

---

### Logout

Press the "Logout" button to Logout Phone !

Click **Logout**, and you will exit web page. If you want to enter it next time, you need input user name and password again.

## 4.4. Settings via phone's keyboard.

### 4.4.1. How to set via the phone's keyboard.

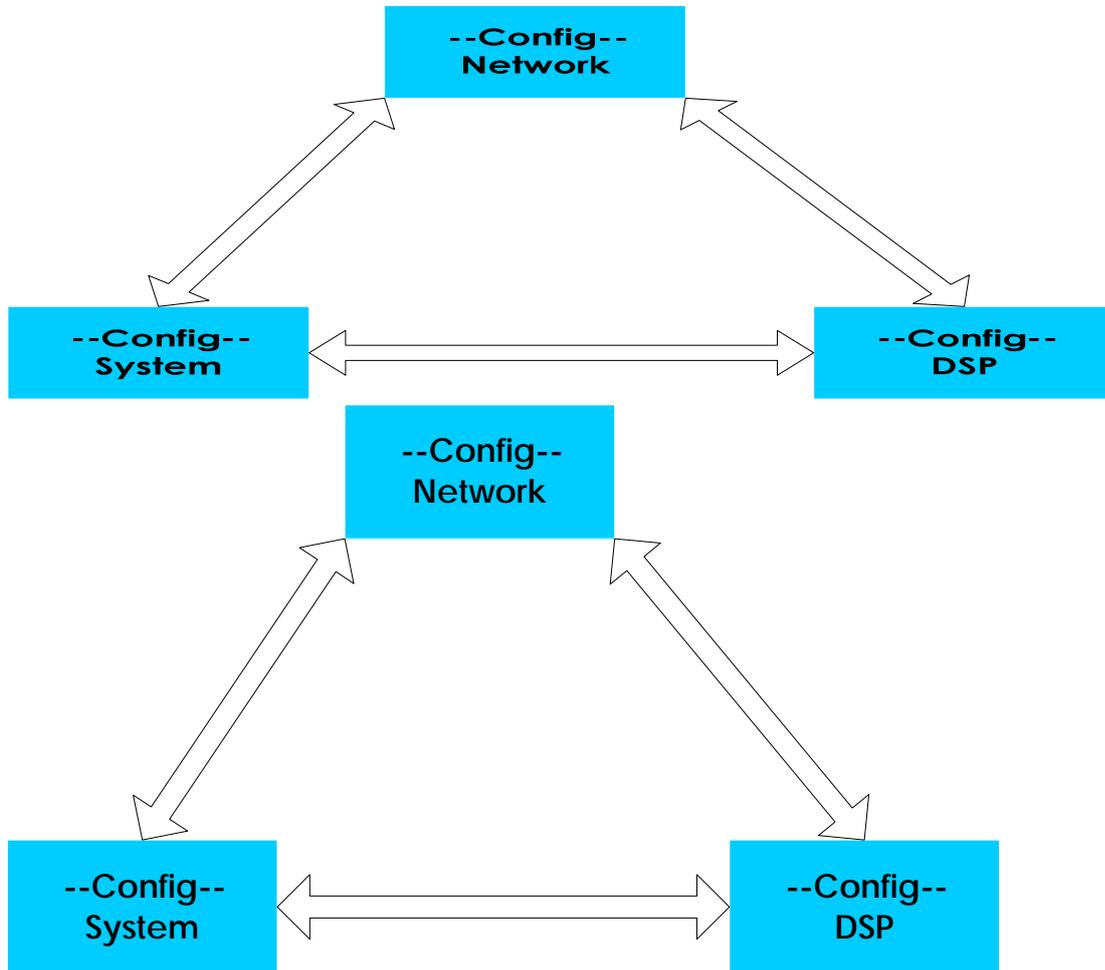
Press Menu, Up/Down, Enter and exit key to browse, select, and cancel

- Use the Up/Down key to browse the menu and submenu

- Use the ENTER key to enter into submenu and confirm your operation, the EXIT key can be used to back and cancel operation.

#### 4.4.2. Phone menu

Phone main menu:



## 5. Appendix

### 5.1. Specification

#### 5.1.1. Device specification

Item		this VoIP Phone
Adapter(Input/Output)		Input:100-240VAC 50~60Hz      Output:5V/1A
Port	WAN	10/100Base- T RJ-45 for LAN, Auto MDIX
	LAN	10/100Base- T RJ-45 for PC, Auto MDIX
Power Consumption		Idle:1.5W/Active:1.8W
LCD size		74 x 28mm
Operation Temperature		0~40℃
Relative Humidity		10~65%
Main Chipset		Broadcom
SDRAM		8Mbits
Flash		2Mbits
Size (W x H x D)		11.6×8×3 in.(295×205×75mm)
Weight		2.07lb.(0.94kg)

### 5.1.2. Voice Features

- Support 2 lines SIP, SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722,G.726
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Support VAD, CNG
- NAT transverse: support STUN
- Supports full duplex.
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server, peer to peer
- SIP support 2 servers, user can through each server to calling in and out
- DTMF:SIP info, DTMF Relay, RFC2833
- SIP application: contain SIP call forward/transfer/holding/waiting/3 way conference/Paging and intercom/ click to dial/pickup/ joincall/redial/unredial.
- Call control features: Flexible dial map, support hotline, empty calling no. reject server, black list for reject, authenticated call, no disturb, caller ID and so on.
- Could dial use private server automatically when public server unregistered while private server is resgistered successfully
- Support phonebook 500 records, incoming calls / outgoing calls / missing calls. Each supports 100 records
- Support MWI
- support conference call in server
- Phonebook supports VCard standard
- Support 12/24 time format.
- Support daylight saving time
- Support path, gruu
- Support SIP Privacy.

### 5.1.3. Network Features

- WAN/LAN: support Bridge mode.
- Support PPPoE for xDSL
- support VLAN
- Support Stun penetration
- Support DHCP get IP on WAN port
- Qos supports Diffserv.
- support network tools: contain ping, trace route, telnet client

### 5.1.4. Maintenance and Management

- The phone supports post mode, can update firmware by post mode.
- Supports different levels of administration.
- Support Boot Monitor

- Can upgrade firmware through boot monitor
- access with different authority
- support auto provisioning
- Can config through Web, Keypad, Telnet
- Can upgrade firmware and configuration file through HTTP, FTP, TFTP
- Support syslog

## 5.2. Digit-character map table

Button	Character	Button	Character
	1 @		7 P Q R S p q r s
	2 A B C a b c		8 T U V t u v
	3 D E F d e f		9 W X Y Z w x y z
	4 G H I g h i		.
	5 J K L j k l		0
	6 M N O m n o		#